

The Donaldson LifeTec™ PES-BN-A is an absolute grade, high performance polyethersulfone filter element that offers:


- Outstanding filtration performance and microbial stabilization of beer, wine and hard seltzers
- Validated log 7 retention efficiency for *pediococcus damnosus* and *lactobacillus linderi*
- Extremely low absorption of proteins
- Highly asymmetrical pore structure for consistent porosity and contamination removal throughout service life
- Compliance with EC/1935/2004 and FDA CFR Title 21 for food contact use
- Conformity with GMP manufacturing requirements as defined by ED/2023/2006
- Robust construction to help resist installation torque and many caustic CIP chemicals



PES-BN-A

FEATURES	BENEFITS
Log 7 retention of many beer and wine spoilage organisms	Helps ensure product quality and flavor profile consistency
Excellent flow characteristics	Minimizes production down time and energy consumption
Highly resistant materials	Materials of construction are resistant to many caustic chemicals that are used in CIP processes for prolonged service life
Extremely low absorption of proteins	Reduces spoilage organisms while allowing desirable proteins to remain in the final product
Compliant with EC/1935/2004 and FDA CFR Title 21	Approved for food contact use

PES-BN-A Flow Characteristics (Water)

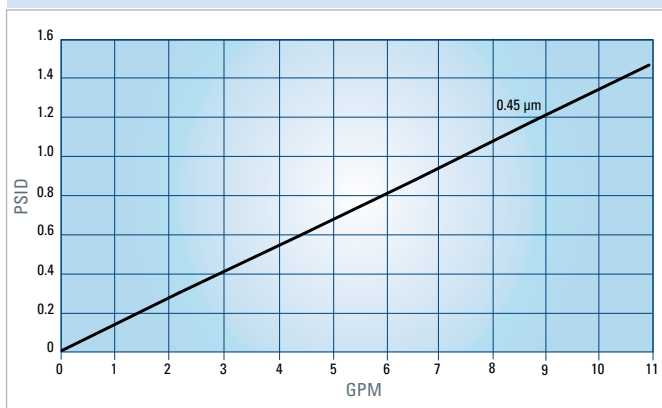

Filter Grade	Maximum Diffusion Values
0.45 μm	25 ml/min @ 1 Bar

Integrity test to be done by Bubble Point or Forward Flow Test. For information on test equipment or test services, please contact your Donaldson Sales Engineer and visit our website at www.donaldsonprocessfilters.com.

INDUSTRIES AND APPLICATIONS

INDUSTRIES			APPLICATIONS	
Brewery	Bottled Water	Hard Seltzer	Cold Stabilization of Beer	Final Filtration of Wine
Wine	Soft Drinks		Clarification of Soft Drinks	Final Filtration of Hard Seltzers

SPECIFICATIONS

CUMULATIVE STEAM CYCLES

The PES-BN-A is rated for 100 steam sterilization cycles with 250°F saturated steam.

- Figures based on steaming resistance lab tests.
- Filter elements must be checked in actual use.
- Contact Donaldson for recommended Autoclaving/Steam procedures.

QUALITY TEST

All products have been inspected and released by Quality Assurance as having met the following requirements:

- All 10" sterile filter modules are integrity tested to verify compliance with established quality and design specifications and to assure consistent and reliable performance.
- The traceability of each filter element according to EC/1935/2004 is provided by serial number.
- All PES-BN-A filter elements are completely staged, assembled, tested and packaged in Class 7 clean room facility, whose Quality Management System is approved by an accredited registering body to the appropriate ISO 9001 Quality Systems Standard.

MATERIAL COMPLIANCE USA

All components of the PES-BN-A filter element are FDA listed for food contact use in the Code of Federal Regulations (CFR), Title 21.

MATERIALS		CFR TITLE 21
Membrane	Polyethersulfone	177.2240
Upstream Support	Polypropylene	177.1520
Downstream Support	Polypropylene	177.1520
Outer Guard	Polypropylene	177.1520
Core	Polypropylene	177.1520
End Caps	Polypropylene	177.1520
O-Rings	EPDM	177.2600
	Silicone	177.2600
Sealing Method	Thermal Bonding	

INTEGRITY TESTING

BACTERIA RETENTION RATES (ACCORDING TO HIMA CHALLENGE PER ASTM)		
Filter Grade	Microorganism	LRV / cm ²
PES-BN-A 0.45 µm	pediococcus damnosus and lactobacillus linderi	> 7


Filter Grade	0.45 µm (Absolute Retention Rate)	
Filtration Surface	0.72 m ² per 250 mm element (10")	
Maximum Differential Pressure	Operating Temperature	Differential Pressure
	100°F	80 psi
	150°F	60 psi
	180°F	30 psi

* Figures are based on lab tests to evaluate steaming resistance. Filter elements need to be checked in actual use. Contact Donaldson for recommended Autoclaving/Steaming procedures.

DIMENSIONS


CODE 7 Connection			
Filter Size	Dimensions (in)		
	a	b	c
10"	9.9	12.4	2.2
20"	19.4	21.9	2.2
30"	28.9	31.5	2.2
40"	38.5	41.0	2.2

Code 7: 2 x 226 O-Rings, bayonet 2 locking tabs, locating fin, integrated reinforcement ring

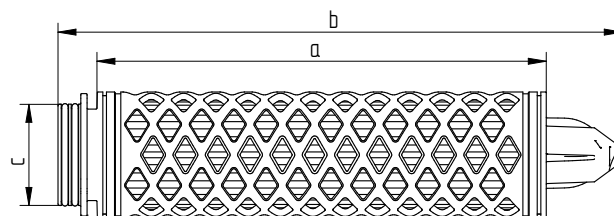

CODE 8 Connection			
Filter Size	Dimensions (in)		
	a	b	c
10"	10.0	12.2	1.7
20"	19.5	21.8	1.7
30"	29.1	31.3	1.7
40"	38.6	40.8	1.7

Code 8: 2 x 222 O-Rings, plug connection, locating fin, integrated reinforcement ring

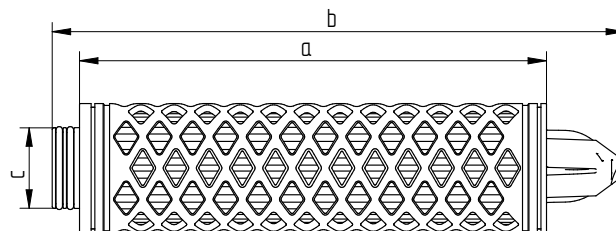

Registered:



Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc.
Minneapolis, MN

donaldson.com
shop.donaldson.com

Australasia 61-02-4350-2066
marketing.australia@donaldson.com

Brazil 55-11-4894-6035
vendas.brasil@donaldson.com

China 86-400-921-7032
info.cn@donaldson.com

EMEA 49-2129-569-0
cap-europe@donaldson.com

India 91-124-4807-400
indiainquiries@donaldson.com

Japan 81-42-540-4123
ndl-ultrafilter-web@donaldson.com

Korea 82-2-517-3333
cap-kr@donaldson.com

Latin America 52-449-300-2442
industrialair@donaldson.com

North America 800-543-3634
processfilters@donaldson.com

South Africa 27-11-997-6000
samarketing@donaldson.com

Southeast Asia 65-6311-7373
sea.salesenquiry@donaldson.com

F117021 ENG (11/20) LifeTec™ PES-BN-A Absolute Membrane Filter Elements
© 2016 Donaldson Co., Inc. All Rights Reserved. Donaldson and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners.
{Contains Donaldson proprietary technology.}